

CAR:LINK™

COMPLETE INSTALLATION & PROGRAMMING GUIDE

CLBTLR Digital RF Kit system



This system must be installed by a professional.

NOTICE

The manufacturer will accept no responsibility for any electrical damage resulting from improper installation of this product, be that either damage to the vehicle itself or to the installed device. This device must be installed by a certified technician. Please review the Installation Guide carefully before beginning any work.

CARLINK™ TABLE OF CONTENTS

HARDWARE PARTS	3
iDATASTART HCx.....	4
iDATASTART VWx.....	6
iDATASTART BM or BZ	8
AKX or OEM.....	10
FLRS.....	12
ADS-AL-CA / FL-CAN.....	14
COMPUSTAR CM7200 / POLARSTART PRS-16	16
COMPUSTAR CM6200	18
POLARSTART PRS-13	20
COMPUSTAR DC2.....	22
COMPUSTAR DC3.....	24
DBALL 2	26
DB3.....	28
4X10 - 5X10 - AF-D600 - ASD200 - ASD-600.....	30
DS4 - DS4+	32
PRESTIGE (E) Models.....	34
PRESTIGE (Z) Models.....	36
PURSUIT (E) Models	38
CODE SYSTEMS.....	40
OLDER CODE SYSTEMS.....	42
OMEGA RS-X70	44
OMEGA AL-XX70-B	46
DSE 503AIR 5R-85	48
DSE iSTART2 - 3.....	50
System LED Status & Protocol Reference Chart.....	52



CREATE AN ACCOUNT

Before beginning the installation and setting the configurations of a Carlink CLBTLR system, we strongly recommend downloading the Application from the App store and create a user account.

- a. Go to the App store (Apple) or Play store (Android) and Search for “Carlink CLBTLR”. Download and install the Free Application.
- b. Launch the newly installed SmartControl Application on your smartphone or tablet
- c. Click “Create an Account”
- d. Fill in all the required fields
- e. Once done, Log into the Application using your email and your newly created password.

CAR:LINK™ HARDWARE PARTS



XTX-3000



RTX-3200






IVU-CAB-4W







HRN-CRF-02

PARTS REQUIRED FOR INSTALLATION OF : iDATASTART HCx

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>iDatastart HCx</p> 	
---	---	--	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the iDatastart HCx remote starter to accept the RF kit system. When flashing the iDatastart HCx remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Using the new Weblink configurator, Choose vehicle Make, Year, Model, Trim.</p>	
<p>c. In the Remote Configuration section, Select the Brand drop-down and Choose “CONNECTED” and select the Connected RF system you are using.</p>	
<p>d. This will load a firmware starting with: “IDPP-XXX-XXX-XXX”</p>	
<p>e. Click “Flash your device”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

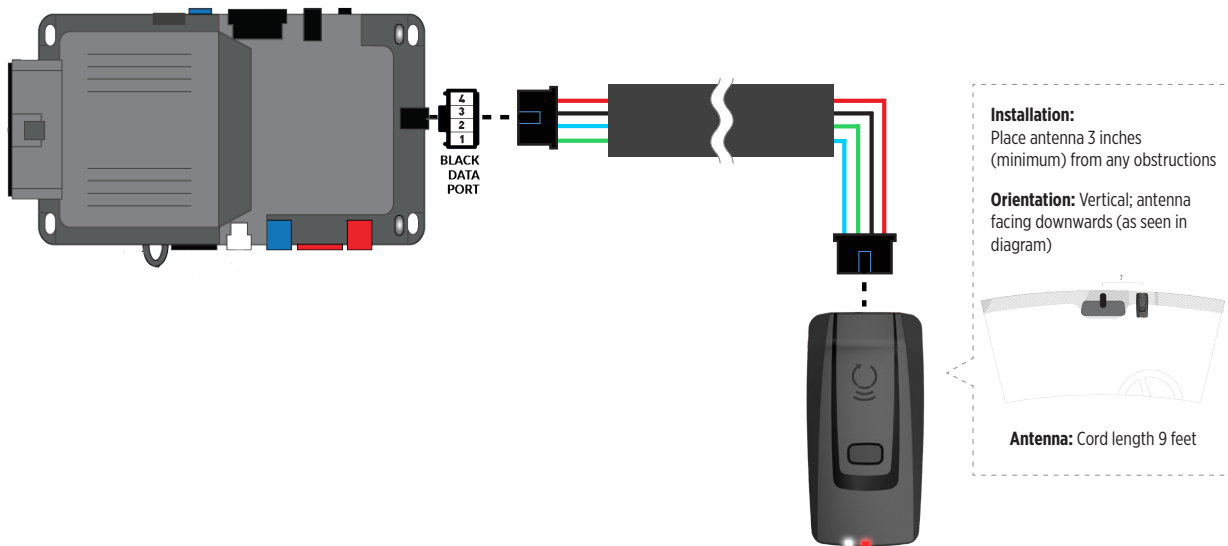

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter **IS NOT armed/locked or in Valet mode** and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.




STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.





NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : iDATASTART VWx

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>iDatastart VWx</p> 	
---	---	--	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the iDatastart VWx remote starter to accept the RF kit system. When flashing the iDatastart VWx remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Using the new Weblink configurator, Choose vehicle Make, Year, Model, Trim.</p>	
<p>c. In the Remote Configuration section, Select the Brand drop-down and Choose “CONNECTED” and select the Connected RF system you are using.</p>	
<p>d. This will load a firmware starting with: “IDPP-XXX-XXX-XXX”</p>	
<p>e. Click “Flash your device”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

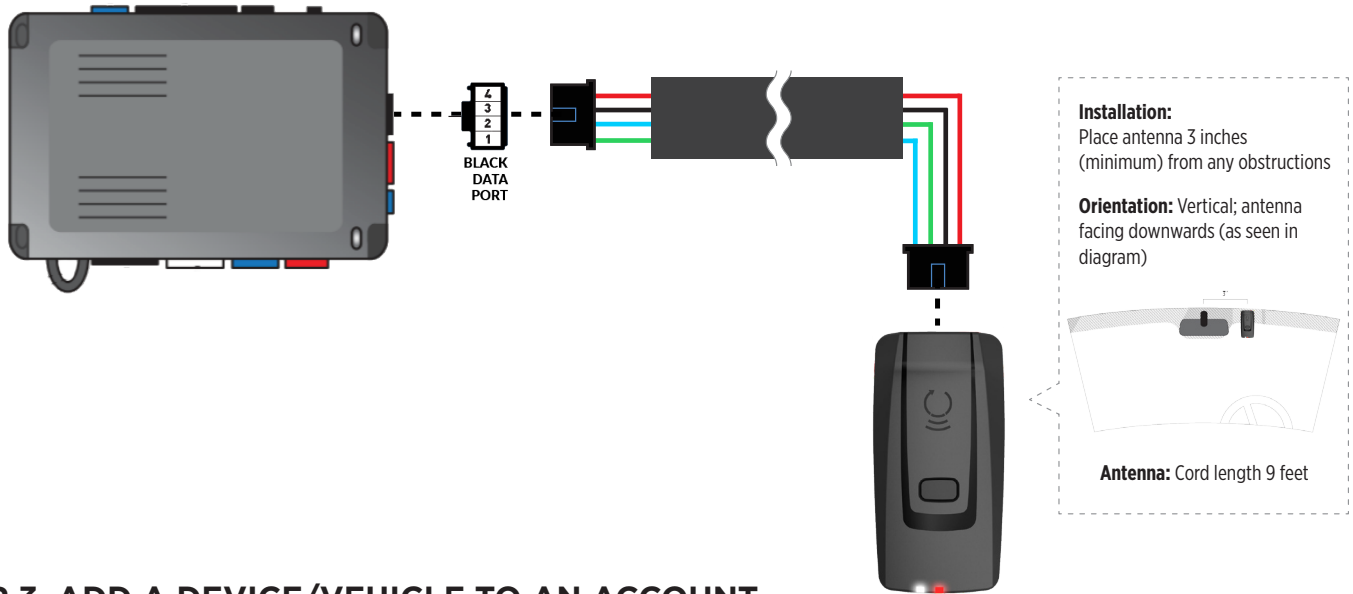

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.




STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : iDATASTART BM or BZ

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>iDatastart BM or BZ</p> 	
---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the iDatastart BM or BZ remote starter to accept the RF kit system. When flashing the iDatastart BM or BZ remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Choose “CONNECTED RF KIT & Telematics”</p>	
<p>d. This will load a firmware starting with: “IDPP-XXX-XXX-XXX”</p>	
<p>e. Click “Flash!”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

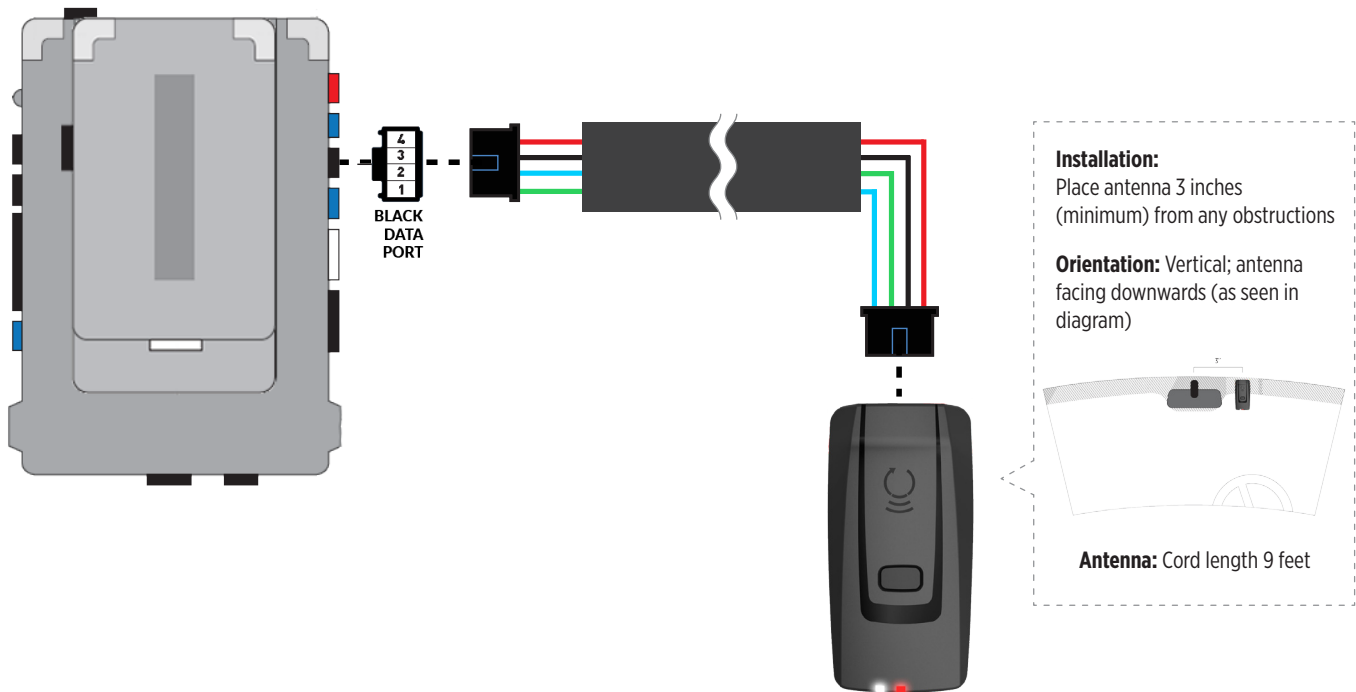

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.




STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : AKX or OEM

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>AKX or OEM</p> 	
---	---	--	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the AKX or OEM remote starter to accept the RF kit system. When flashing the AKX or OEM remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Choose “CONNECTED RF KIT & Telematics”</p>	
<p>d. This will load a firmware starting with: “IDPP-XX(XX)-XXX (X.X)”</p>	
<p>e. Click “Flash!”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

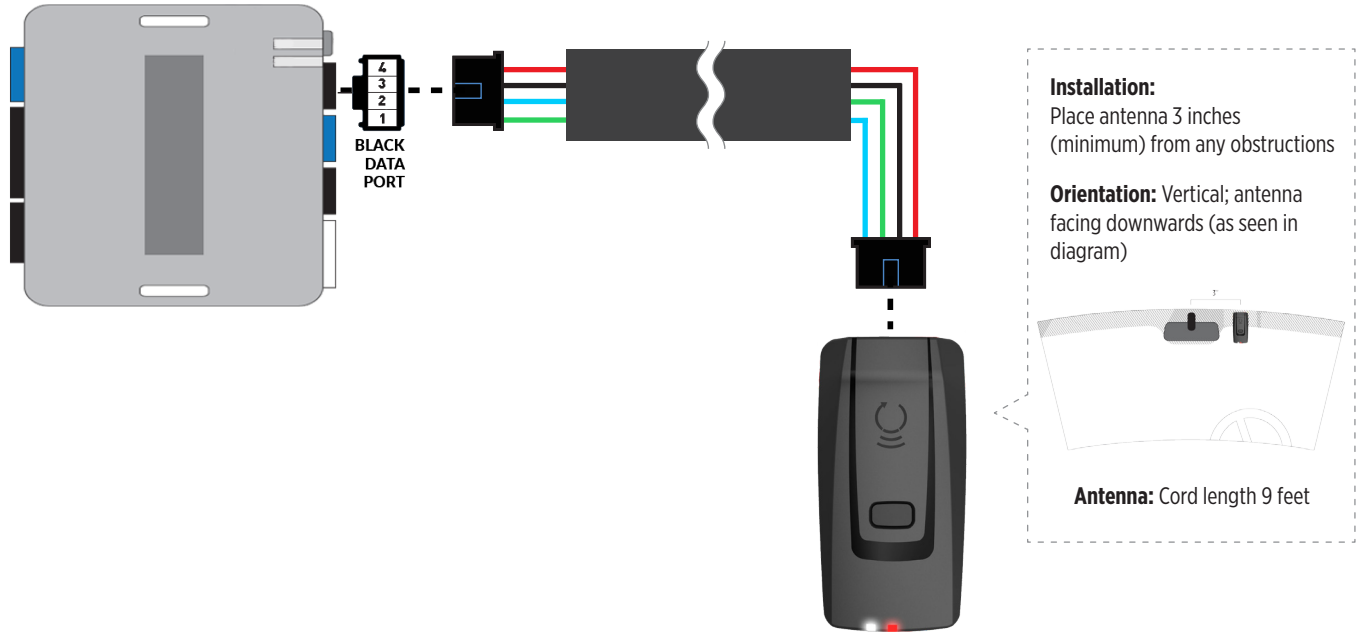

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.




STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : FLRS

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>FLRS</p> 	
---	---	--	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the FLRS remote starter to accept the RF kit system. When flashing the FLRS remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Choose “ASCL6”</p>	
<p>d. This will load a firmware starting with: “TMP-XX(XX)-XXX (X.X)”</p>	
<p>e. Click “Flash!”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

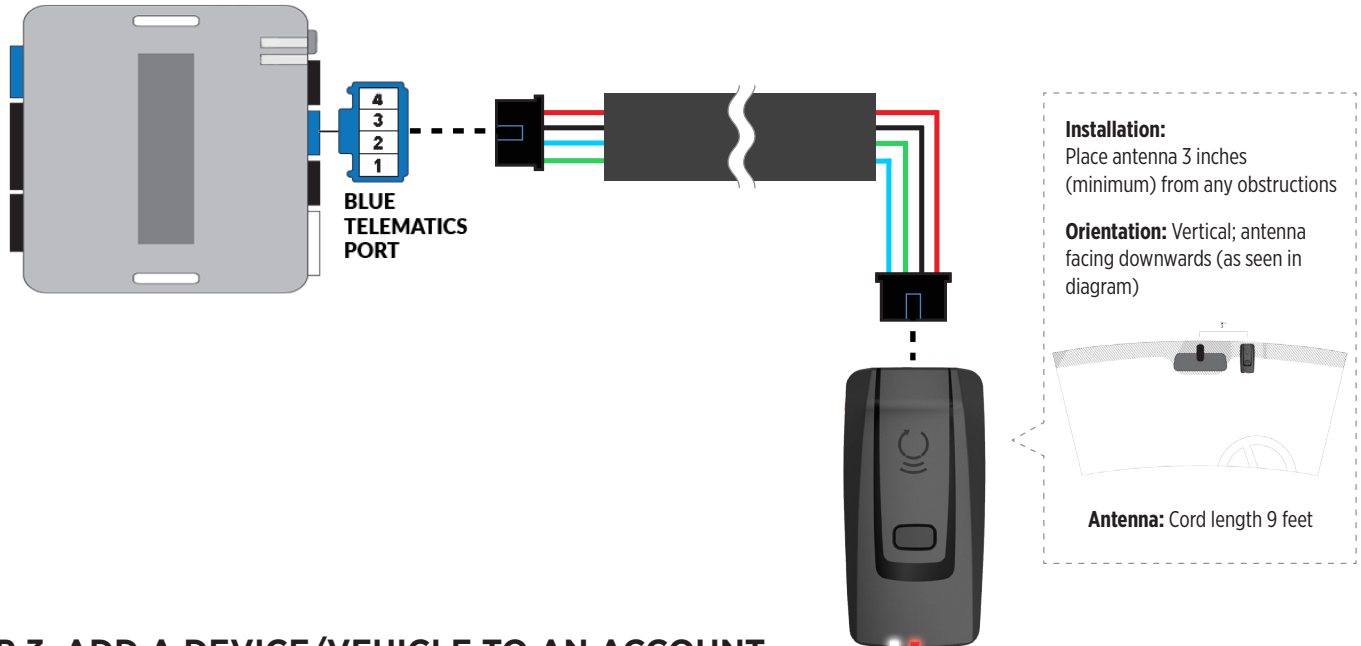

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the "+" sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to "Scan QR Code" and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in "Installer Mode". Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on "Confirm". System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click "OK" when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click "OK" at the top right corner. All Configurations will take effect.





STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the "installer icon" at the top of control screen. When prompted Click "Yes, and delete system from account" since this is the installer mode and not the End User mode. This will make the system "Ready for Customer Delivery".

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : ADS-AL-CA / FL-CAN

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>ADS-AL-CA / FL-CAN</p> 	<p>HRN-CRF-02</p> 
---	---	--	---


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the AKX or OEM remote starter to accept the RF kit system. When flashing the AKX or OEM remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Choose “CONNECTED RF KIT & Telematics”</p>	
<p>d. This will load a firmware starting with: “IDPP-XX(XX)-XXX (X.X)”</p>	
<p>e. Click “Flash!”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

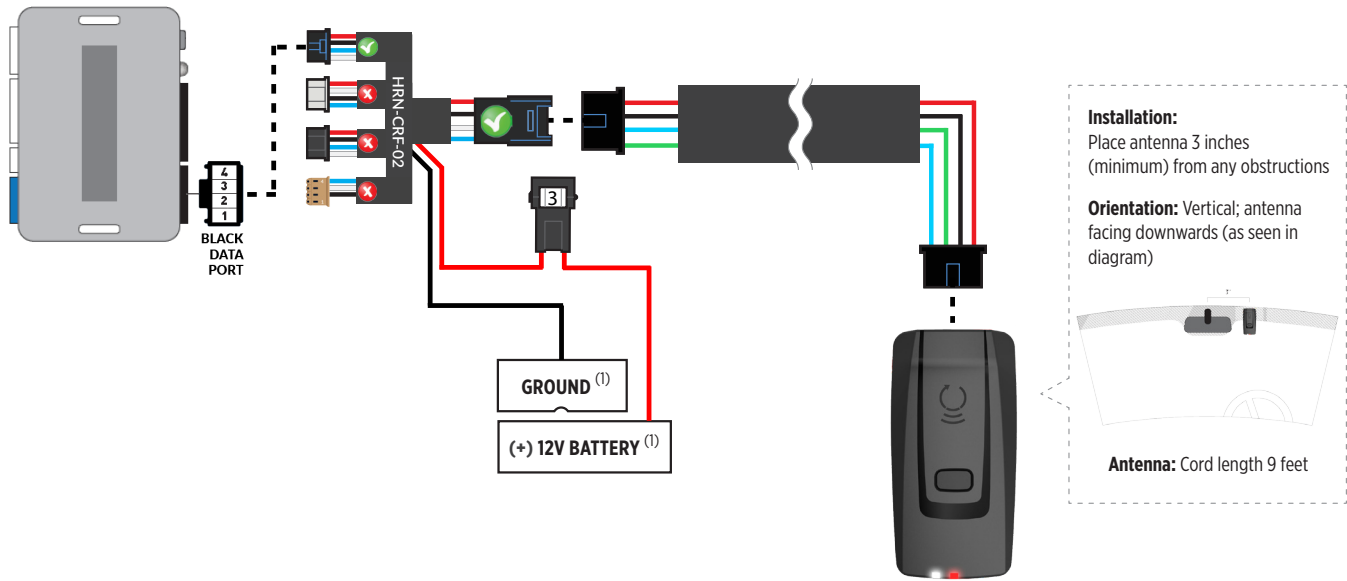

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : COMPUSTAR CM7200 / POLARSTART PRS-16

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>CM7200 / PRS-16</p> 	<p>BLADE-AL (64)</p> 
---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Compustar or Polarstart remote starter to accept the RF kit system. When flashing the Compustar or Polarstart remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Under the ADS-BLADE AL tab, Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Click “Flash!”</p>	
<p>d. Once done click on the Remote Starter tab and click on “Flash my starter” in order to update the remote starter firmware</p>	
<p>e. Click “Flash!”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

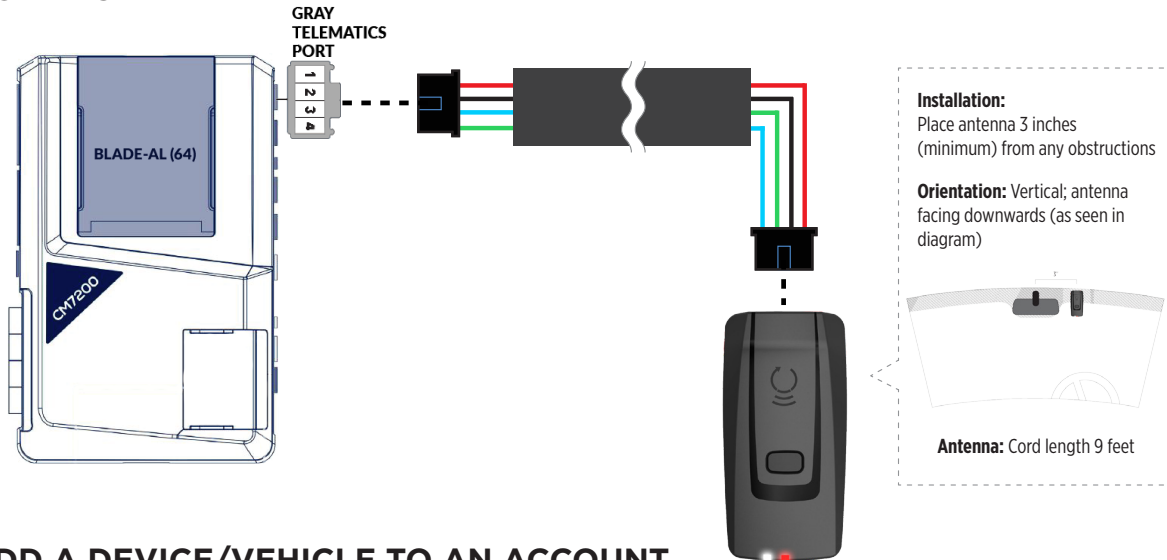

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.





STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : COMPUSTAR CM6200

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>Compustar CM6200</p> 	<p>BLADE-AL (64)</p> 
---	---	--	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the CM-7200 remote starter to accept the RF kit system. When flashing the CM-7200 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Under the ADS-BLADE AL tab, Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT >>"/></p>
<p>c. Click “Flash!”</p>	
<p>d. Once done click on the Remote Starter tab and click on “Flash my starter” in order to update the remote starter firmware</p>	
<p>e. Click “Flash!”</p>	

CAR:LINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

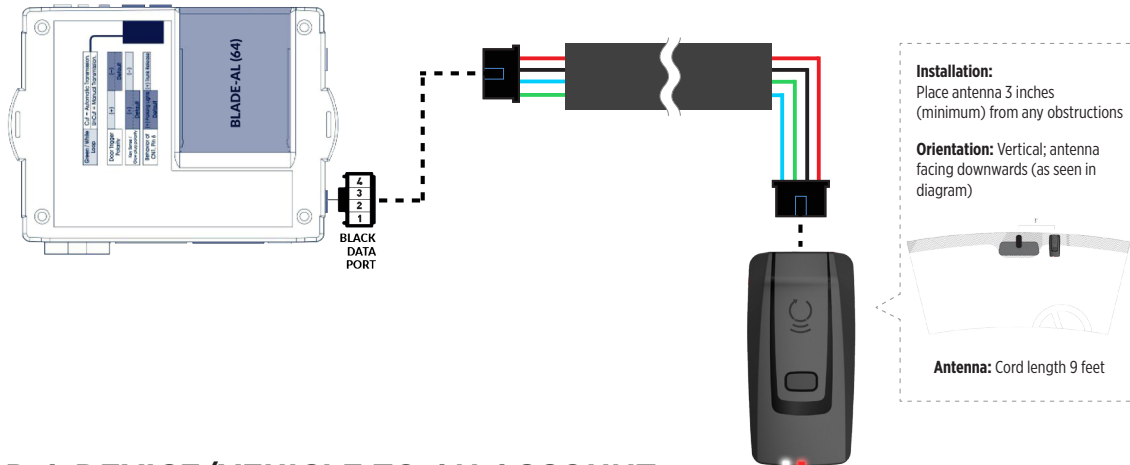

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : POLARSTART PRS-13


<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>PRS-13</p> 	<p>BLADE-AL (64)</p> 
---	---	--	--

STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Polarstart remote starter to accept the RF kit system. When flashing the Polarstart remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Under the ADS-BLADE AL tab, Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Click “Flash!”</p>	
<p>d. Once done click on the Remote Starter tab and click on “Flash my starter” in order to update the remote starter firmware</p>	
<p>e. Click “Flash!”</p>	

STEP 2. CONNECT

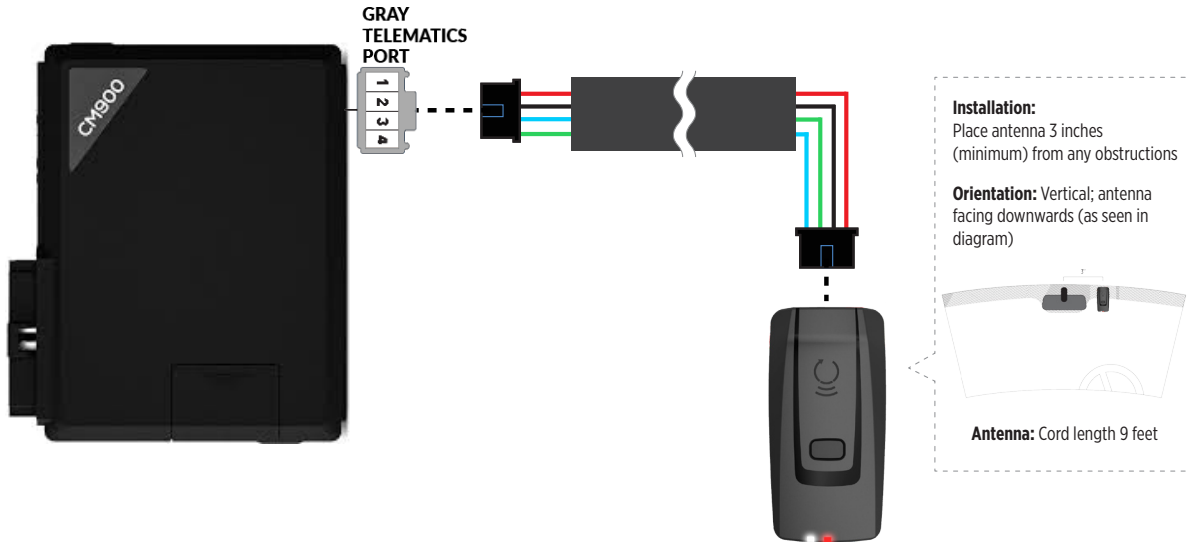

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windsheild of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.




STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windsheild mounted antenna.





NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : COMPUSTAR DC2

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>Compustar DC2</p> 	
---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Compustar DC2 remote starter to accept the RF kit system. When flashing the Compustar DC2 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Using the new Weblink configurator, Choose vehicle Make, Year, Model, Trim.</p>	
<p>c. In the Telematics Device section, Turn On the Drone Telematics option</p>	
<p>d. This will load a firmware starting with: “COM-XXX-XXX-XXX”</p>	
<p>e. Click “Flash your device”</p>	

CAR:LINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

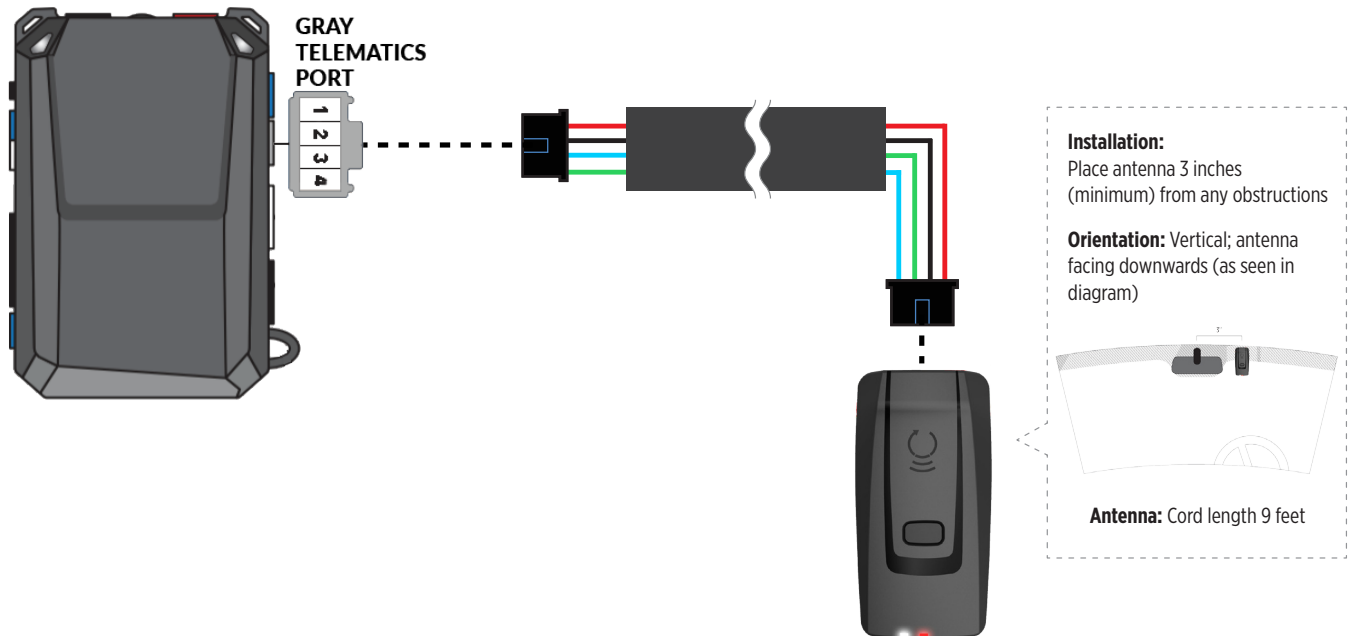

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windsheild of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windsheild mounted antenna.





NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : COMPUSTAR DC3

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>Compustar DC3</p> 	
---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Compustar DC3 remote starter to accept the RF kit system. When flashing the Compustar DC3 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Using the new Weblink configurator, Choose vehicle Make, Year, Model, Trim.</p>	
<p>c. In the Telematics Device section, Turn On the Drone Telematics option</p>	
<p>d. This will load a firmware starting with: “COM-XXX-XXX-XXX”</p>	
<p>e. Click “Flash your device”</p>	

CAR:LINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

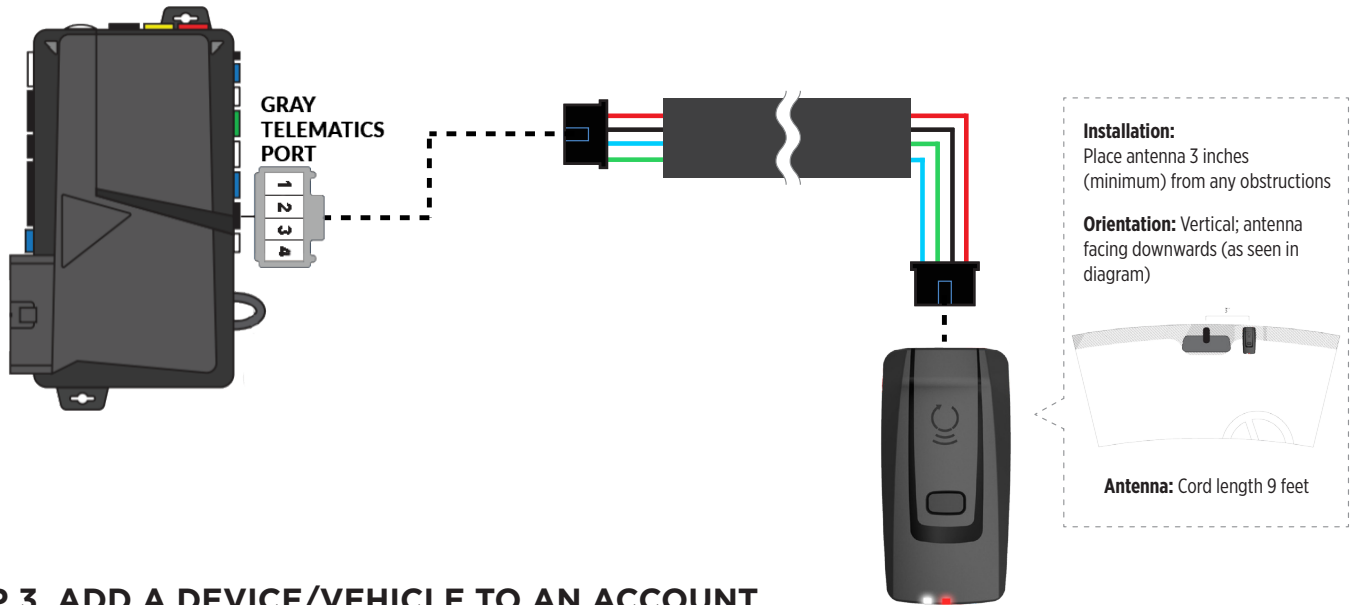

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.


NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : DBALL 2

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>DBALL2</p> 	<p>HRN-CRF-02</p> 
---	---	--	---


STEP 1. CONFIGURE THE REMOTE STARTER

The XKloader 2 or 3 is required to properly configure the DBALL 2 remote starter to accept the RF kit system. When flashing the DBALL 2 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.directechs.com and click on “Flash module”</p>	<input type="button" value="Flash Module"/>						
<p>b. Choose vehicle Make, Model, Year</p>	<table border="1"> <tr> <td>YEAR</td> <td>MAKE</td> <td>MODEL</td> </tr> <tr> <td>Select Year ▼</td> <td>Select Make ▼</td> <td>Select Model ▼</td> </tr> </table>	YEAR	MAKE	MODEL	Select Year ▼	Select Make ▼	Select Model ▼
YEAR	MAKE	MODEL					
Select Year ▼	Select Make ▼	Select Model ▼					
<p>c. Run thru the configuration process and make sure to choose “Config for RSR”</p>	<input type="checkbox"/> Config for RSR						
<p>d. Choose “SmartStart” option.</p>	<input type="checkbox"/> 						
<p>e. Complete the configuration process.</p>							
<p>f. Click “Flash!”</p>	<input type="button" value="Flash"/>						

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

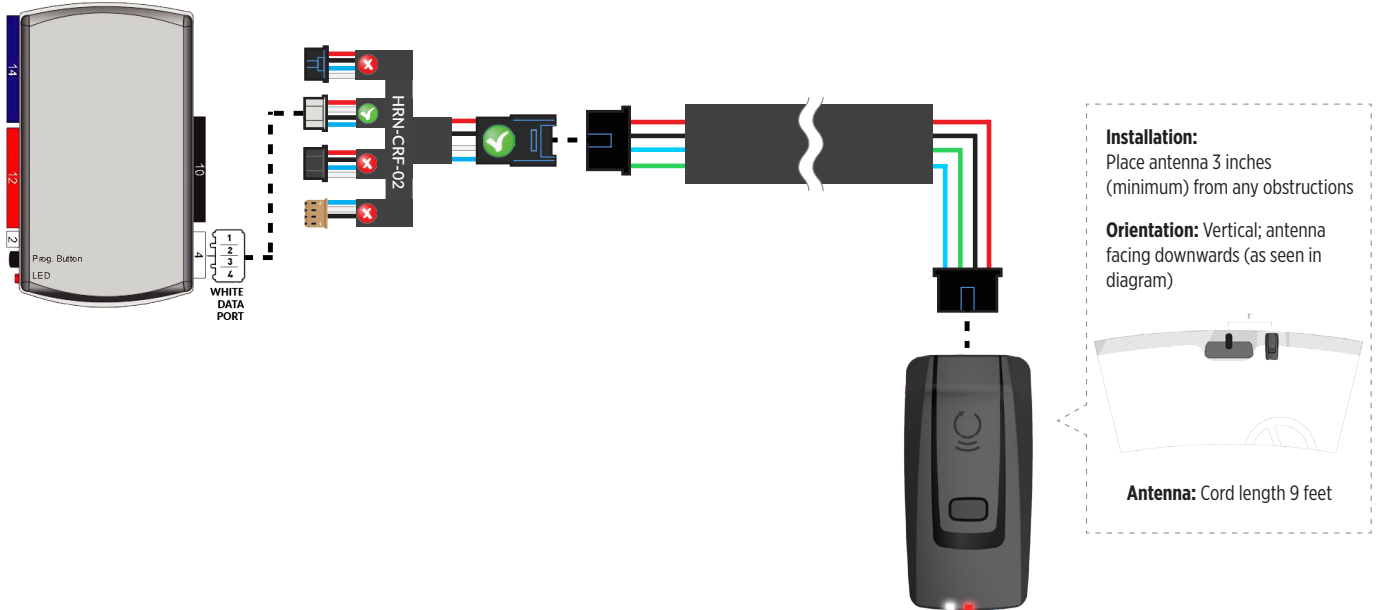

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.


NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : DB3

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>DB3</p> 	<p>HRN-CRF-02</p> 
---	---	---	---


STEP 1. CONFIGURE THE REMOTE STARTER

The XKloader 2 or 3 is required to properly configure the DB3 remote starter to accept the RF kit system. When flashing the DB3 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.directechs.com and click on “Flash module”</p>	<input type="button" value="Flash Module"/>						
<p>b. Choose vehicle Make, Model, Year</p>	<table border="1"> <tr> <td>YEAR</td> <td>MAKE</td> <td>MODEL</td> </tr> <tr> <td>Select Year ▼</td> <td>Select Make ▼</td> <td>Select Model ▼</td> </tr> </table>	YEAR	MAKE	MODEL	Select Year ▼	Select Make ▼	Select Model ▼
YEAR	MAKE	MODEL					
Select Year ▼	Select Make ▼	Select Model ▼					
<p>c. Run thru the configuration process and make sure to choose “Config for RSR”</p>	<input type="checkbox"/> Config for RSR						
<p>d. Choose “SmartStart” option.</p>	<input type="checkbox"/> 						
<p>e. Complete the configuration process.</p>							
<p>f. Click “Flash!”</p>	<input type="button" value="Flash"/>						

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

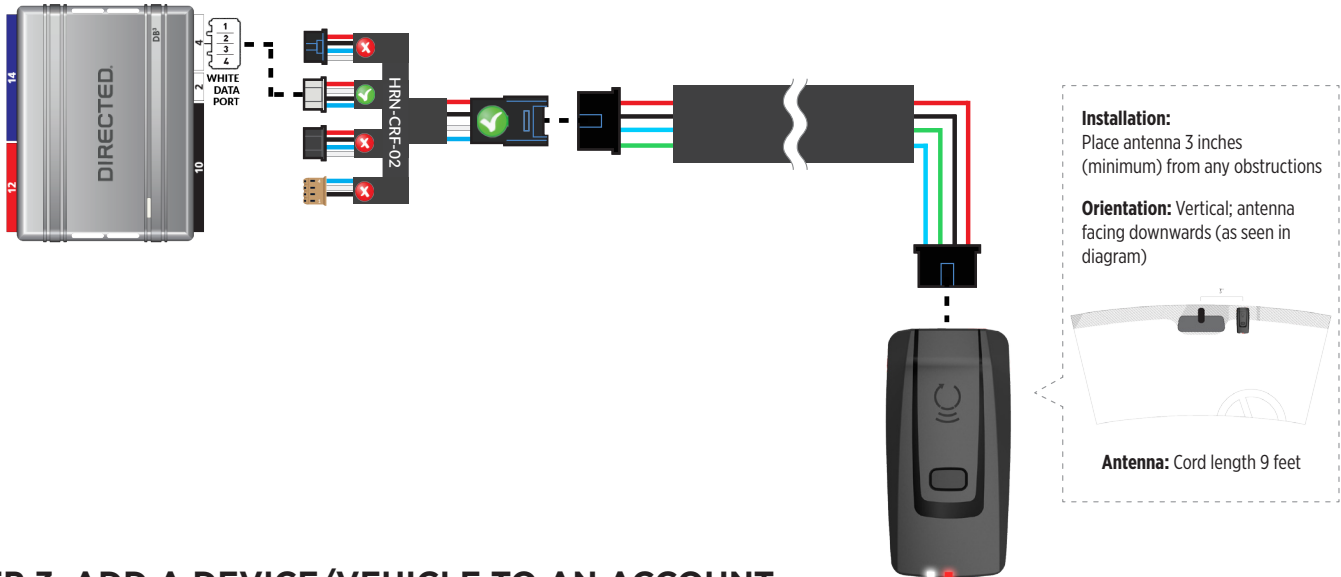

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.


NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : 4X10 - 5X10 - AF-D600 - ASD200 - ASD-600

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>4X10 - 5X10 - AF-D600 ASD200 - ASD600</p> 	<p>HRN-CRF-02</p> 
---	---	---	---


STEP 1. CONFIGURE THE REMOTE STARTER

The XKloader 2 or 3 is required to properly configure the 4X10 - 5X10 remote starter to accept the RF kit system. When flashing the 4X10 - 5X10 - AF-D600 - ASD200 - ASD600 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

a. Go to www.directechs.com and click on “Flash module”	<input type="button" value="Flash Module"/>						
b. Choose vehicle Make, Model, Year	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="font-size: small;">YEAR</th> <th style="font-size: small;">MAKE</th> <th style="font-size: small;">MODEL</th> </tr> <tr> <td style="text-align: center;">Select Year <input type="text"/></td> <td style="text-align: center;">Select Make <input type="text"/></td> <td style="text-align: center;">Select Model <input type="text"/></td> </tr> </table>	YEAR	MAKE	MODEL	Select Year <input type="text"/>	Select Make <input type="text"/>	Select Model <input type="text"/>
YEAR	MAKE	MODEL					
Select Year <input type="text"/>	Select Make <input type="text"/>	Select Model <input type="text"/>					
c. Run thru the configuration process and make sure to choose “Remote Start”	<input checked="" type="checkbox"/> Remote Start						
d. Choose “SmartStart” option.	<input type="checkbox"/> 						
e. Complete the configuration process.							
f. Click “Flash!”	<input type="button" value="Flash"/>						

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

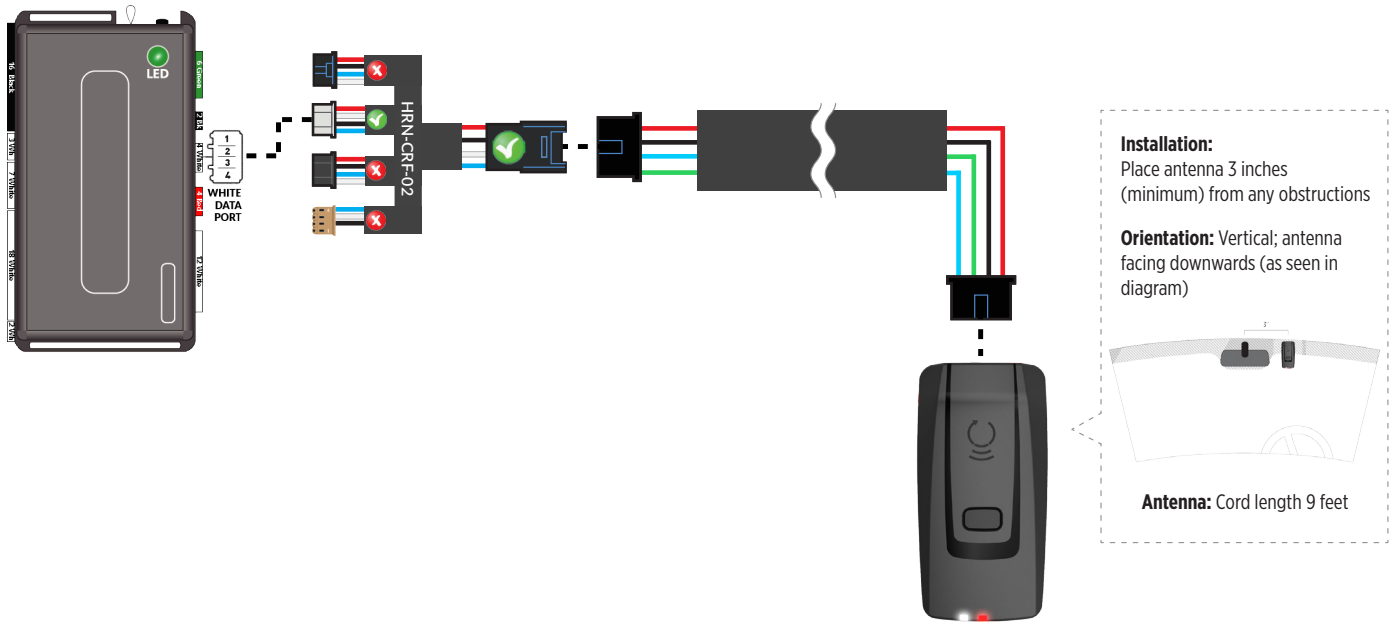

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.






NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : DS4 - DS4+

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>DS4 / DS4+</p> 	<p>HRN-CRF-02</p> 
---	---	--	---


STEP 1. CONFIGURE THE REMOTE STARTER

The XKloader 2 or 3 is required to properly configure the DS4 - DS4+ remote starter to accept the RF kit system. When flashing the DS4 - DS4+ remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.directechs.com and click on “Flash module”</p>	
<p>b. Choose vehicle Make, Model, Year</p>	
<p>c. Run thru the configuration process and make sure to choose “Remote Start”</p>	
<p>d. Choose “SmartStart” option.</p>	
<p>e. Complete the configuration process.</p>	
<p>f. Click “Flash!”</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

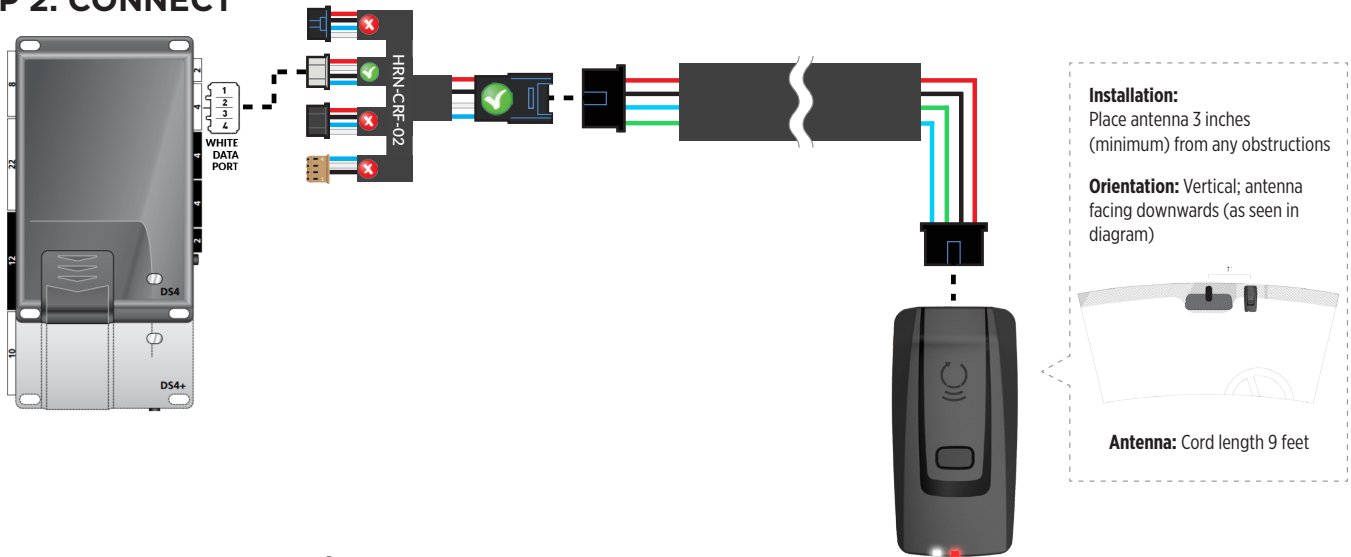

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.





STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.






NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : PRESTIGE (E) Models

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>(E) Model</p> 	<p>HRN-CRF-02</p> 
---	---	---	---


STEP 1. CONFIGURE THE REMOTE STARTER

The Voxx VEPROG is required to upgrade the latest Firmware and properly configure the Prestige (E) Model remote starter to accept the RF kit system. When updating the Prestige (E) Model remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Open "Internet Explorer 11" and go to "WWW.VEPROG.COM"</p>	
<p>b. Click on "Detect Device" button on the center of the screen</p>	
<p>c. Click on "Firmware Update" tab, then click on "FLASH" and wait for the update to be completed</p>	
<p>d. Choose from the Alarm programming menu, Feature #18, Option #3 or #4 - ADS TEL</p>	
<p>e. Click "Accept" at the bottom of the Unit option page</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

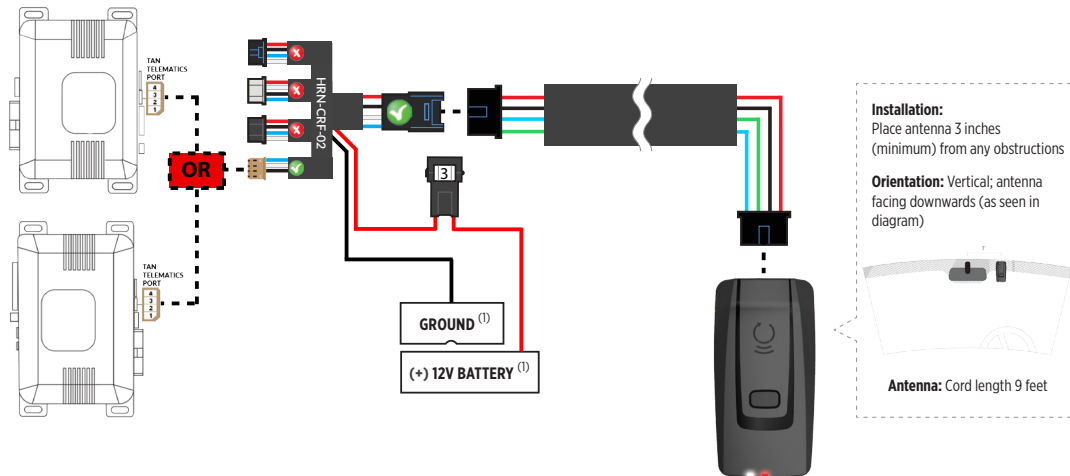

(1) Connect when using with PRESTIGE.

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.




STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.



NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : PRESTIGE (Z) Models

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>(Z) Model</p> 	
---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Prestige (Z) model remote starter to accept the RF kit system. When flashing the Prestige (Z) model remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Then click on “Flash my starter” in order to update the remote starter firmware</p>	
<p>c. Click “Flash!”</p>	
<p>d. Then go to “Configure my starter” and ensure the “ADS” option is selected under Programming bank 2, Data Port Protocol.</p>	
<p>e. Click “Save Now”</p>	

CAR:LINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

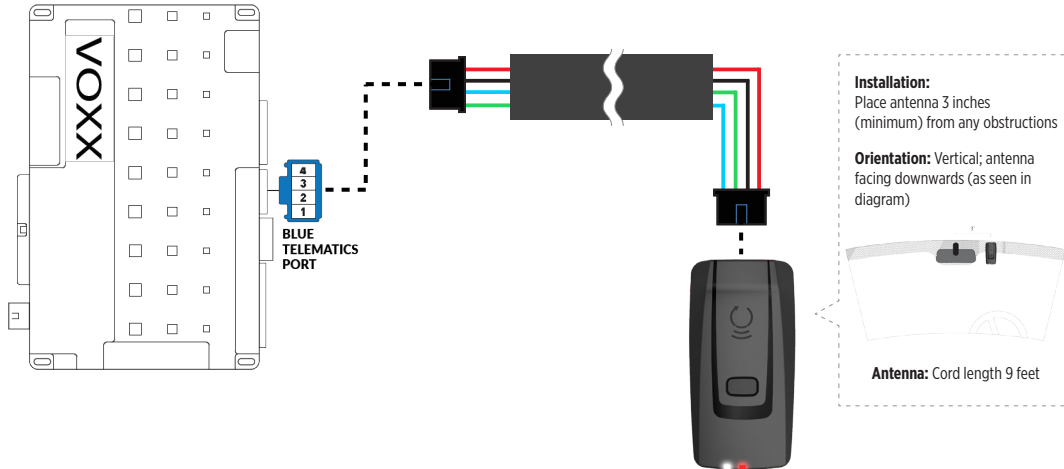

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.





STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.






NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : PURSUIT (E) Models

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>(E) Model (Exc.PRO9233E)</p> 	<p>HRN-CRF-02</p> 
---	---	--	---


STEP 1. CONFIGURE THE REMOTE STARTER

The Voxx VEPROG is required to upgrade the latest Firmware and properly configure the Prestige (E) Model remote starter to accept the RF kit system. When updating the Prestige (E) Model remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Open "Internet Explorer 11" and go to "WWW.VEPROG.COM"</p>	
<p>b. Click on "Detect Device" button on the center of the screen</p>	
<p>c. Click on "Firmware Update" tab, then click on "FLASH" and wait for the update to be completed</p>	
<p>d. Choose from the Alarm programming menu, Feature #18, Option #3 or #4 - ADS TEL</p>	
<p>e. Click "Accept" at the bottom of the Unit option page</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

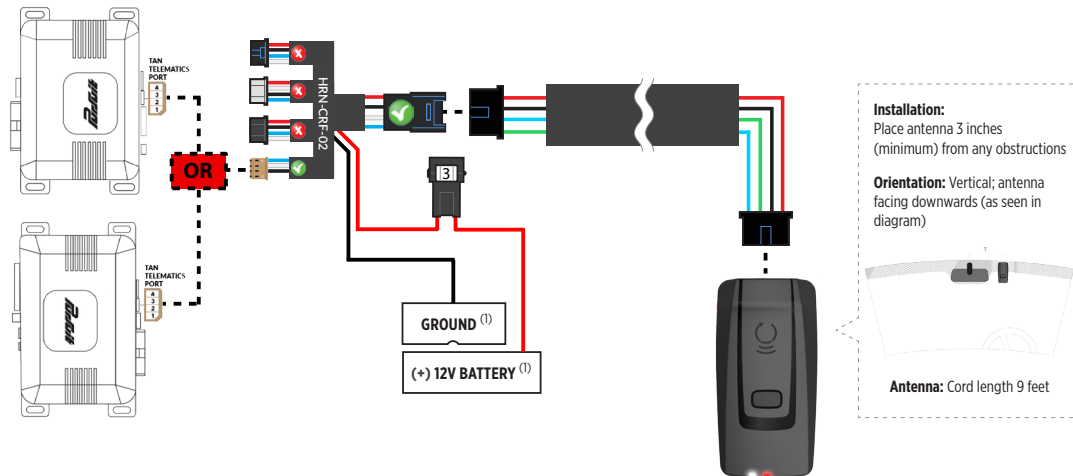

(1) Connect when using with PURSUIT.

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : CODE SYSTEMS

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>CASECRS, CARS or CA4555</p> 	<p>HRN-CRF-02</p> 
---	---	---	---


STEP 1. CONFIGURE THE REMOTE STARTER

The Voxx VEPROG is required to upgrade the latest Firmware and properly configure the Code Alarm CASECRS, CARS or CA4555 remote starter to accept the RF kit system. When updating the Code Alarm CASECRS, CARS or CA4555 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Open the “Code Alarm Utility App”</p>	
<p>b. Click on “Firmware Update” button at the top right of the screen and wait for the update to be completed</p>	
<p>c. Choose from the programming Bank #2, Feature #9, Option #3 or #4 - ADS Telematics</p>	<p>2.9 DBI Port Protocol /Telematic Port Protocol</p> <p> <input type="radio"/> DBI /Voxx Telematic (1 LED FLASH) <input type="radio"/> ADS /Voxx Telematic (2 LED FLASH) <input type="radio"/> DBI/ ADS Telematic (3 LED FLASH) </p> <p> <input checked="" type="radio"/> ADS/ ADS Telematic (4 LED FLASH) </p>
<p>d. Click “Accept” at the bottom of the Unit option page</p>	

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

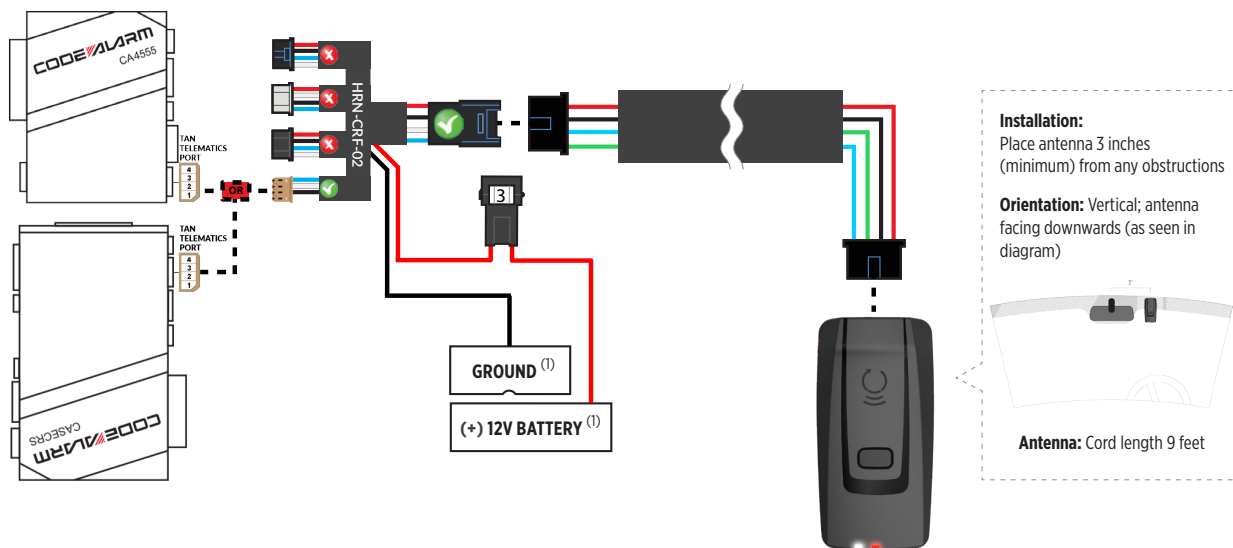

(1) Connect when using with CODE ALARM.

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.

NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : OLDER CODE SYSTEMS


XTX-3000



IVU-CAB-4W



OLDER CODE ALARM



HRN-CRF-02




STEP 1. CONFIGURE THE REMOTE STARTER

The Older Code Alarm remote starter are already pre-configured to accept the RF kit system. No extra programming required.

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

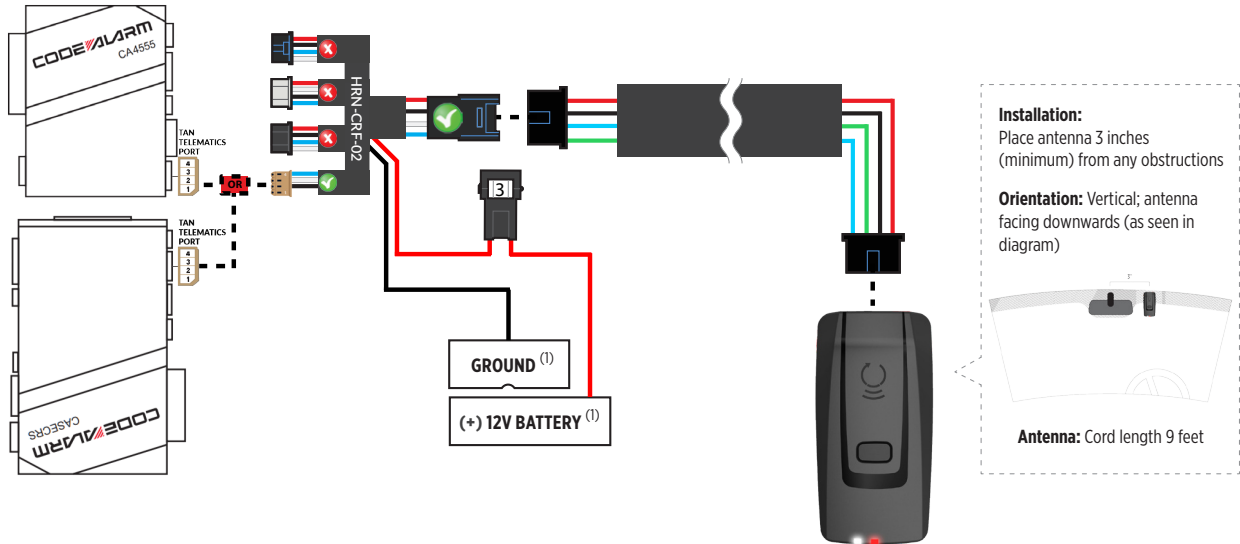

(1) Connect when using with CODE ALARM.

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.






STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : OMEGA RS-X70

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>RS-X70</p> 	<p>HRN-CRF-02</p> 	<p>BLADE-AL (64)</p> 
---	---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Omega RS-X70 remote starter to accept the RF kit system. Please make sure to **use a BLADE-AL (64) and update the firmware to the latest firmware available. Follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>					
<p>b. Go Under “FLASH MY STARTER” tab</p>					
<p>c. Click “Flash!”</p>					
<p>d. Once done, click on “CONFIGURE MY STARTER” tab, find “Data Port Protocol” and set it to “Green=iData”</p>	<table border="1"> <tr> <td>Green = DBI Black = DBI</td> </tr> <tr> <td>Green = DBI Black = iData</td> </tr> <tr> <td>Green = iData Black = DBI</td> </tr> <tr> <td>Green = iData Black = iData</td> </tr> </table>	Green = DBI Black = DBI	Green = DBI Black = iData	Green = iData Black = DBI	Green = iData Black = iData
Green = DBI Black = DBI					
Green = DBI Black = iData					
Green = iData Black = DBI					
Green = iData Black = iData					
<p>e. Click “Save Now”</p>					

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

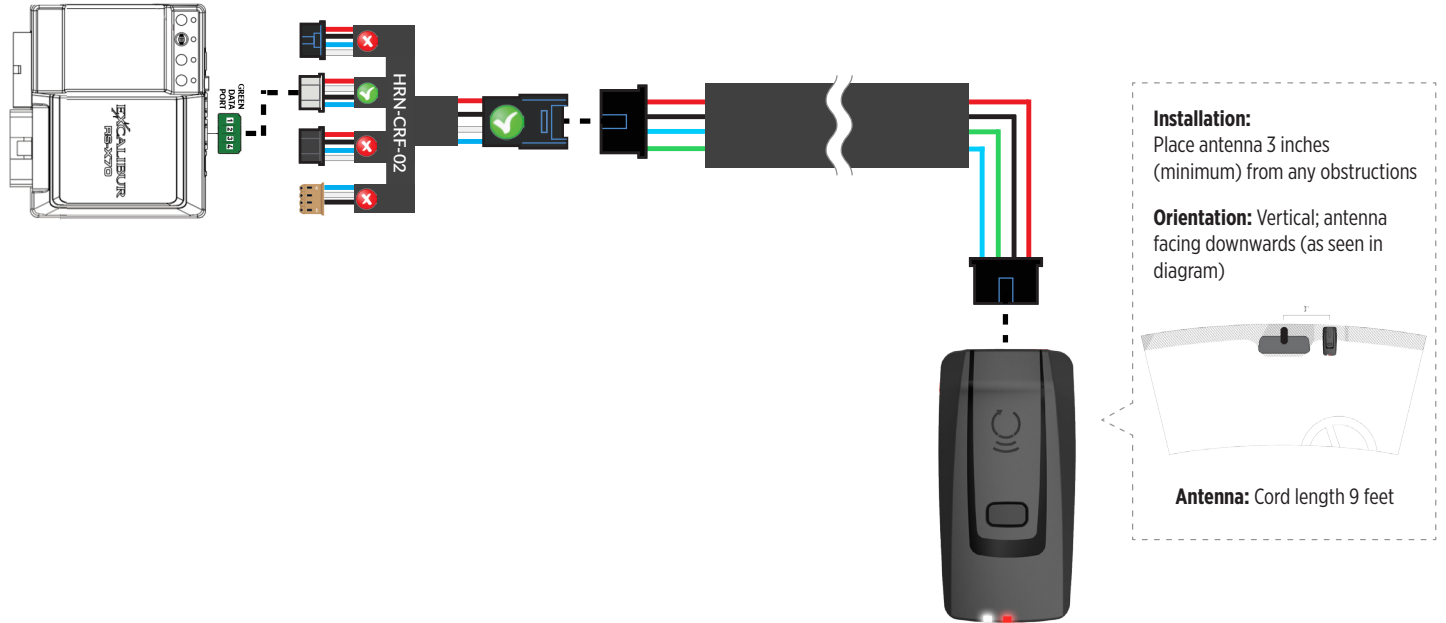

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.






STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.




NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : OMEGA AL-XX70-B

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>AL-XX70-B</p> 	<p>HRN-CRF-02</p> 	<p>BLADE-AL (64)</p> 
---	---	--	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the Omega AL-XX70-B remote starter to accept the RF kit system. Please make sure to **use a BLADE-AL (64) and update the firmware to the latest firmware available. Follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>									
<p>b. Go Under “FLASH MY STARTER” tab</p>									
<p>c. Click “Flash!”</p>									
<p>d. Once done, click on “CONFIGURE MY STARTER” tab, find “Data Port Protocol” and set it to “Green=iData”</p>	<table border="1"> <tr> <td>Green = DBI</td> <td>Black = DBI</td> </tr> <tr> <td>Green = DBI</td> <td>Black = iData</td> </tr> <tr> <td>Green = iData</td> <td>Black = DBI</td> </tr> <tr style="background-color: #00aaff;"> <td>Green = iData</td> <td>Black = iData</td> </tr> </table>	Green = DBI	Black = DBI	Green = DBI	Black = iData	Green = iData	Black = DBI	Green = iData	Black = iData
Green = DBI	Black = DBI								
Green = DBI	Black = iData								
Green = iData	Black = DBI								
Green = iData	Black = iData								
<p>e. Click “Save Now”</p>									

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

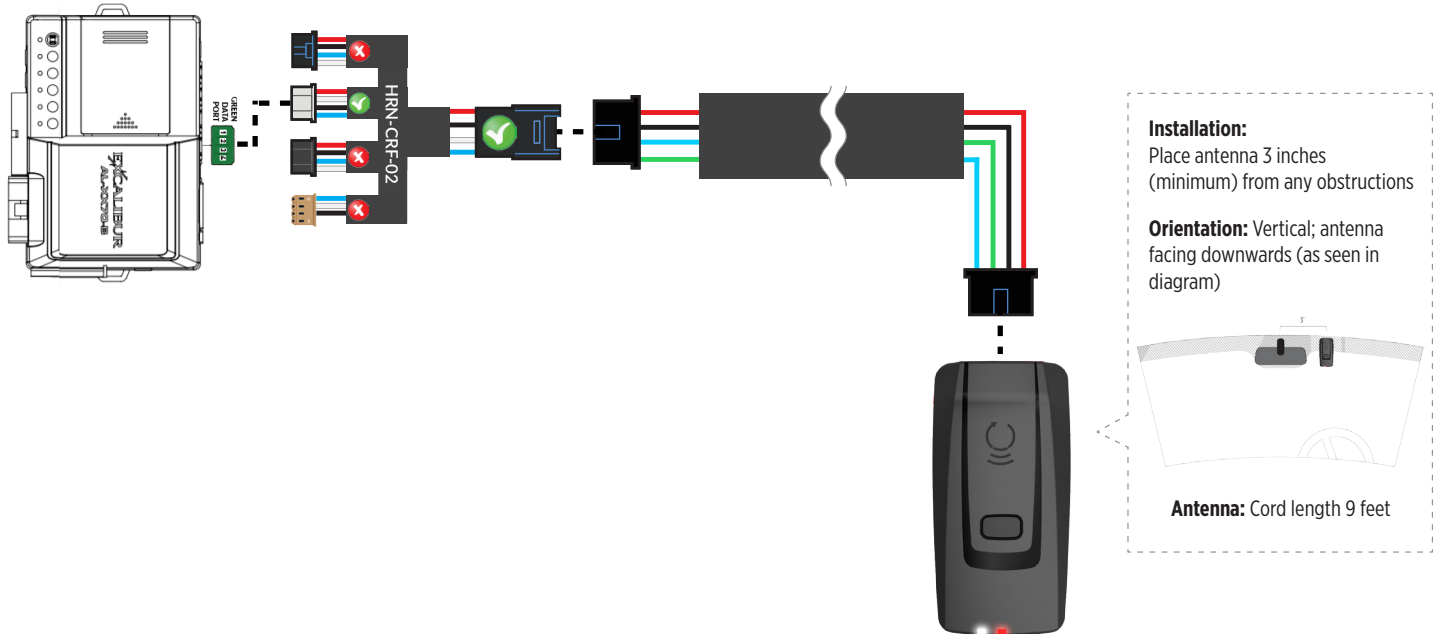

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.

NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

PARTS REQUIRED FOR INSTALLATION OF : DSE 503AIR 5R-85


<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>DSE 503AIR 5R85</p> 	
---	---	---	--

STEP 1. CONFIGURE THE REMOTE STARTER

The 503Air is already pre-configured to accept the RF kit system. No extra programming required.

CARLINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

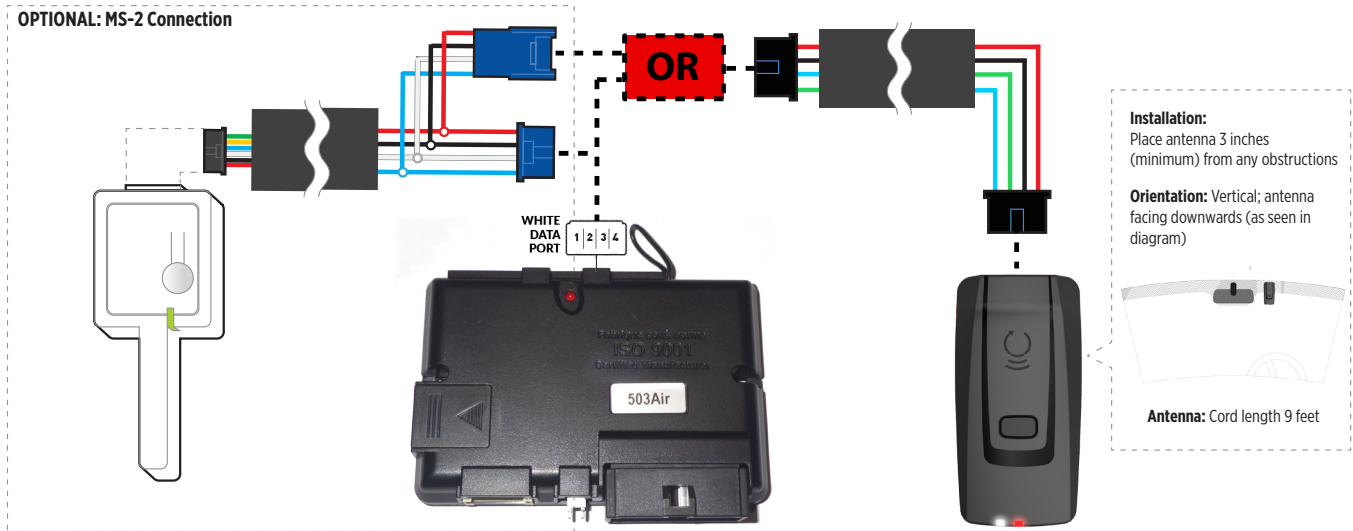

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.





STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.



NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

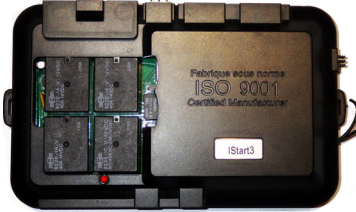PARTS REQUIRED FOR INSTALLATION OF : DSE iSTART2 - 3

<p>XTX-3000</p> 	<p>IVU-CAB-4W</p> 	<p>DSE iStart2 - 3 CI3R-86</p> 	<p>BLADE-AL (64)</p> 
---	---	---	--


STEP 1. CONFIGURE THE REMOTE STARTER

The ADS Weblink (ADS-USB) is required to properly configure the iStart2 - iStart3 remote starter to accept the RF kit system. When flashing the iStart2 - iStart3 remote starter, **please follow this procedure in order to configure correctly your remote starter.**

<p>a. Go to www.idatalink.com and click on “Flash your module”</p>	
<p>b. Under the ADS-BLADE AL tab, Choose vehicle Make, Model, Year, Trim</p>	<p>VEHICLE SELECTION</p> <p>FILTER: <input type="text" value="Select a make"/> <input type="text" value="All Years"/> <input type="text" value="All models"/> <input type="text" value="All trims"/> <input type="button" value="NEXT --"/></p>
<p>c. Click “Flash!”</p>	
<p>d. Once done click on the Remote Starter tab and click on “Flash my starter” in order to update the remote starter firmware</p>	
<p>e. Click “Flash!”</p>	

CAR:LINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

STEP 2. CONNECT

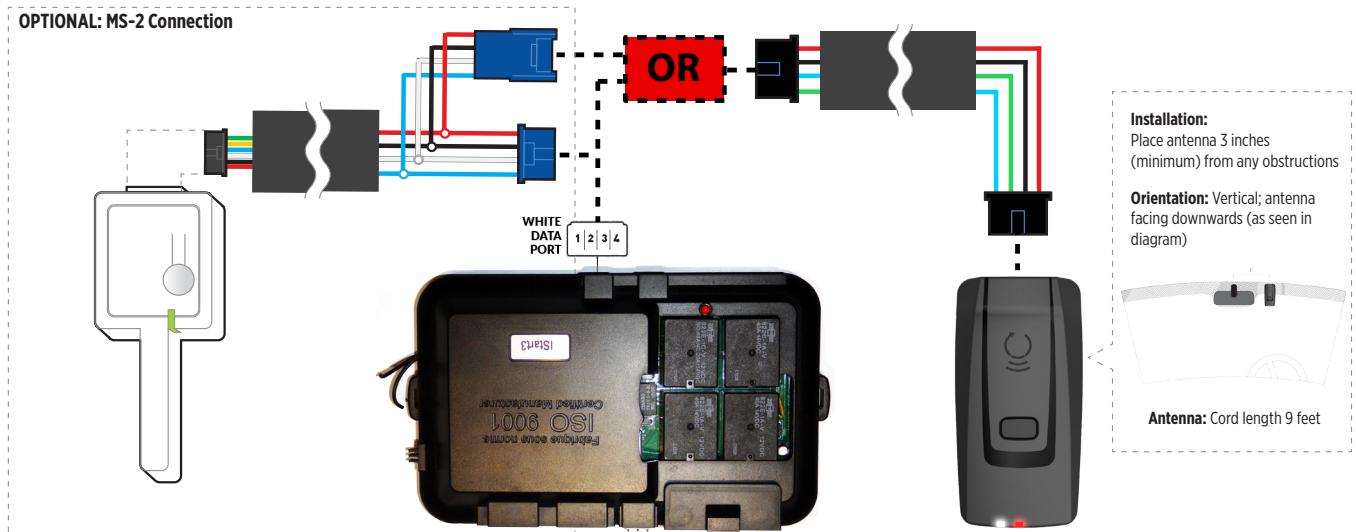

STEP 3. ADD A DEVICE/VEHICLE TO AN ACCOUNT

- Download the App and Log into your account (see page 2 of this document for details)
- Click the “+” sign at the bottom right of the Application screen. This will allow you to temporarily add and configure your customers system inside your personal account. A system refers to the Antenna being installed in the windshield of the vehicle.
- Before adding a system to your device, ensure the remote starter IS NOT armed/locked or in Valet mode and set the ignition of the vehicle to the On position.
- Then Tap to “Scan QR Code” and use the smartphone camera to scan the QR Code located on top of the antenna.
- Once connected, the system is in “Installer Mode”. Follow the on-screen instructions for configuring the system.

STEP 4. PRE-CONFIGURE THE APPLICATION EXPERIENCE FOR YOUR CUSTOMER

- Start by setting the protocol of the antenna being used. This is achieved by selecting the Brand, Model and protocol used inside the Remote starter. When done, click on “Confirm”. System will now try to communicate with the remote starter to confirm that all settings related to protocol are valid.
- Once back in the control panel, click on the Settings Gear at the top right of the screen and edit the Vehicle name, configure the Auxiliaries that might have been added (if applicable) and click “OK” when done. Then choose the vehicle to display inside the control panel in the VEHICLE IMAGE section and click OK.
- When your configurations are all completed, click “OK” at the top right corner. All Configurations will take effect.

STEP 5. TESTING THE SYSTEM

When the system is connected and fully configured, testing can begin. Test all the application functions (Start, Stop, Lock, Unlock, Auxiliaries, Etc.) When testing is completed, tap on the “installer icon” at the top of control screen. When prompted Click “Yes, and delete system from account” since this is the installer mode and not the End User mode. This will make the system “Ready for Customer Delivery”.

Also make sure that the Owners Card is handed to the Owner of the vehicle or attached to the vehicle keychain. Doing this will ensure that the instructions on how to setup their App, Account and add the System is done correctly by using the system QR Code affixed on the windshield mounted antenna.

NOTE : UNDER ANY CIRCUMSTANCES, PLEASE DO NOT REMOVE THE QR CODE FROM THE ANTENNA!

System LED Status & Protocol Reference Chart

LED Status	Protocol		
	Name	inside Application	inside Remote Starter
1x Flash	Connected RF protocol	Connected RF	IDPP
2x Flashes	Directed protocol	SMARTSTART	SMARTSTART
3x Flashes	ADS Telematics protocol	ADS TEL	ADS TEL or DRONE
4x Flashes	Fortin protocol	Fortin 2	Fortin 2
5x Flashes	Omega Research	ADS TEL	ADS TEL
6x Flashes	Posse protocol	Voxx Tel	Voxx Tel
7x Flashes	N/A	N/A	N/A
8x Flashes	No protocol - (Default)	N/A	N/A

Reset Procedure

- 1 - Disconnect the main harness from the Antenna.
- 2 - Wait approximately 10 seconds and reconnect the main harness to the Antenna.
- 3 - Reset procedure Completed.

CAR:LINK™ INSTALLATION, WIRING & PROGRAMMING GUIDE

CAR:LINK™